

4" Slim Panel Downlight


Equipped with a 9W, 840-lumen downlight, this fixture offers 5 selectable color temperatures, a 2-hour fire-rated cable, and is suitable for wet locations. Triac dimmable and featuring a sealed aluminum housing, it guarantees long-lasting performance and energy efficiency. With an exceptionally low defect rate, it provides a reliable lighting solution for both residential and commercial settings.

KEY FEATURES:


- 9w Color Selectable (5CCT) Slim Panel Downlight
- Fire rated 2H FT4 cable
- IP 54 suitable for wet locations
- Energy Star, cETLus Listed
- Type IC rated
- Less than 0.1% defective rate
- 6 pack contractor packaging
- 50,000 hour life
- Acrylic PMMA light guide, Air-tight aluminum housing
- No flicker, mercury free, instant on

APPLICATION

- Offices
- Museum
- Commercial
- Retail
- Hospitality
- Lighting Showroom



DIMENSION

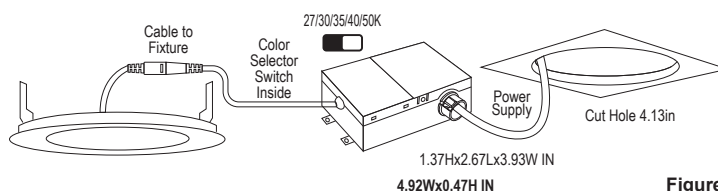

Figure

SPECIFICATIONS

Luminous Efficacy	810/840lm
CCT	2700K/3000K/3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	110°
Input Voltage	120V 50/60Hz
IP Rating	IP54
Life Hours	50,000 Hours
LED Type/Chip	SMD2835/Epistar
Dimmable	Triac Dimmable
Operating Temp.	-20°C ~+40°C
Warranty	5 Year Warranty
Certifications	Energy Star, ETL

MODEL NO.	ES ID	WATTS	LUMENS	CCT(K)	MOL (IN)	MOUNT SIZE (IN)	UNIT OF SALE
LIA-SPD4-9W-5CCT-LV-WH-D-6PK	under process	9W	810 840 840 840 840	2700K 3000K 3500K 4000K 5000K	4.92	4.2	6 pcs/box, 8 box/ctn 48 pcs/ctn 160 box/skid 20 ctn/skid 960 pcs/skid
Optional Accessories LIA-SPD4-RING-BK-6PK		Black Changeable Snap-on Smart Rings for 4in Slims, Fits most 120-125MM Downlights 6 Pack					