

4" Baffle Gimbal

Equipped with 12W 1200lm 95+ CRI baffle gimbal, this fixture features a 110° beam angle and 36° tilt angle for ultimate flexibility. 5CCT adjustable, fire-rated FT6 cable, and wet location rated, it ensures efficient, long-lasting performance with a sealed aluminum housing, triac dimming, and an exceptionally low defect rate, this fixture delivers a dependable lighting solution for both residential and commercial spaces.

KEY FEATURES:


- 12w Color adjustable (5CCT) Baffle Gimbal Downlight
- 95+ CRI
- Fire rated 2H FT6 cable
- IP 54 suitable for wet locations
- Energy Star, cETLus Listed
- COB Type LED, Type IC rated
- Less than 0.1% defective rate
- 50,000 hour life
- No flicker, mercury free, instant on

APPLICATION

- Offices
- Museum
- Commercial
- Retail
- Hospitality
- Lighting Showroom



DIMENSION

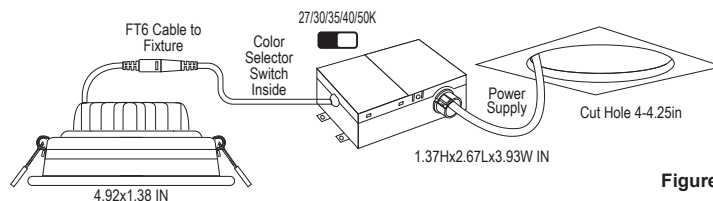

Figure

SPECIFICATIONS

Luminous Efficacy	1200lm
CCT	2700K/3000K/3500K/4000K/5000K (Selectable)
CRI	>Ra95+
Tilt/Beam Angle	36°/110°
Input Voltage	120V 50/60Hz
IP Rating	IP54
Life Hours	50,000 Hours
LED Type/Chip	COB Type
Dimmable	Triac Dimmable
Operating Temp.	-10°C ~+40°C
Warranty	5 Year Warranty
Certifications	Energy Star, ETL

MODEL NO.	ES ID	WATTS	LUMENS	CCT(K)	MOL (IN)	MOUNT SIZE (IN)	UNIT OF SALE
LIA-BGBL4-12W-5CCT-LV-WH-D (White trim)	under process	12W	1200	2700K	4.92	4.25	1 pc/box
LIA-BGBL4-12W-5CCT-LV-BK-D (Black trim)				3000K			40 pcs/ctn
				3500K			24 ctn/skid
				4000K			960 pcs/skid
				5000K			