

LED Backlit Panel (2x2, 1x4, 2x4)

Designed for versatility and efficiency, LED Backlit Panels offer power and color adjustability in 2x2, 1x4, and 2x4FT sizes. These fixtures ensure high performance with 0-10V dimming and a slim 1.17-inch thin profile for seamless integration. Featuring a high CRI of 80+, a polycarbonate diffuser, and a durable aluminum housing. Ideal energy-efficient lighting solution for any commercial applications.

KEY FEATURES:


- Power & Color Adjustable 2x2, 1x4 2x4^{FT} Backlit Panel
- ETL listed, DLC 5.1 Premium
- Dimmable (0-10V)
- Slim profile 1.17 inch housing
- High CRI 80+
- 50,000 hour life
- Polycarbonate diffuser
- Aluminum housing AL6063-T6
- No flicker, mercury free, instant on

APPLICATION

- Healthcare
- Museum
- Commercial
- Offices
- Hospitality
- Lighting Showroom



DIMENSION

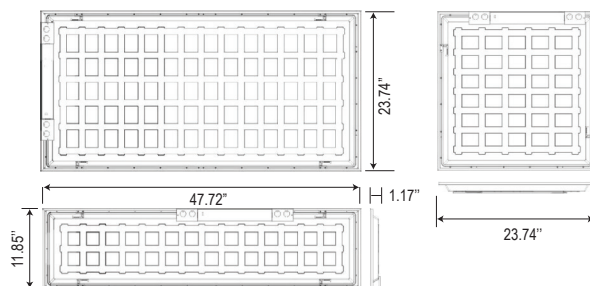

SPECIFICATIONS

Luminous Efficacy	125lm/W
CCT	3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	120°
Input Voltage	120-347V
IP Rating	IP20
Life Hours	50,000 Hours
LED Driver	Fosen
LED Type/Chip	SMD2835
Dimmable	0-10V Dimmable
Operating Temp.	-40°C ~+45°C
Warranty	5 Year Warranty
Certifications	DLC Premium, ETL

MODEL NO.	DLC ID	WATTS	LUMENS	CCT(K)	PF	MOL	CASE QTY.
LIA-BLP22-40W-3CCT-HV-2PK	S-BTKH8H	30/35/40W	3750/4375/5000	3500/4000/5000 (K)	0.9	23.74x23.74x1.17	2
LIA-BLP14-40W-3CCT-HV-2PK	S-5S5KN4	30/35/40W	3750/4375/5000	3500/4000/5000 (K)	0.9	47.72x11.85x1.17	2
LIA-BLP24-50W-3CCT-HV-2PK	S-9QK4G6	30/40/50W	3750/5000/6250	3500/4000/5000 (K)	0.9	47.72x23.74x1.17	2
Optional Accessories							
LIA-BLP22-SMFK-2PK		2x2' Surface Mount Frame Kit for Backlit Panel 2.4in Height					
LIA-BLP14-SMFK-2PK		1x4' Surface Mount Frame Kit for Backlit Panel 2.4in Height					
LIA-BLP24-SMFK-2PK		2x4' Surface Mount Frame Kit for Backlit Panel 2.4in Height					