

4" Gimbal 360

Equipped with 9W 900lm gimbal, this fixture features a 36° beam angle, 90° tilt, and 360° rotation for ultimate flexibility. 5CCT adjustable, fire-rated cable, and wet location rated, it ensures efficient, long-lasting performance with a sealed aluminum housing, triac dimming, and an exceptionally low defect rate, this fixture delivers a dependable lighting solution for both residential and commercial spaces.

KEY FEATURES:


- 9w Color adjustable (5CCT) Gimbal 360 Downlight
- Fire rated 2H FT4 cable
- IP 54 suitable for wet locations
- Energy Star, cETLus Listed
- 360° Rotation, 36° beam, 90° tilt
- COB Type LED, Type IC rated
- Less than 0.1% defective rate
- 50,000 hour life
- Acrylic PMMA light guide, Air-tight aluminum housing
- No flicker, mercury free, instant on

APPLICATION


- Offices
- Museum
- Commercial
- Retail
- Hospitality
- Lighting Showroom



LIA-GBL4



DIMENSION

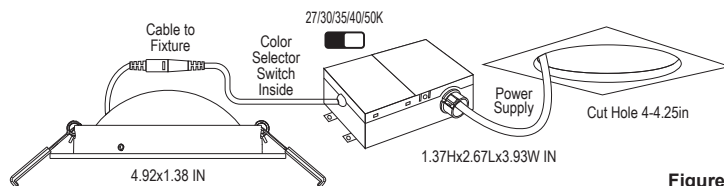

Figure

SPECIFICATIONS

Luminous Efficacy	900lm
CCT	2700K/3000K/3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	36°
Input Voltage	120V 50/60Hz
IP Rating	IP54
Life Hours	50,000 Hours
LED Type/Chip	SMD2835/Epistar
Dimmable	Triac Dimmable
Operating Temp.	-20°C ~+40°C
Warranty	5 Year Warranty
Certifications	Energy Star, ETL

MODEL NO.	ES ID	WATTS	LUMENS	CCT(K)	MOL (IN)	MOUNT SIZE (IN)	UNIT OF SALE
LIA-GBL4-9W-5CCT-LV-WH-D (White trim)	under process	9W	900	2700K	4.92	4.25	1 pc/box 40 pcs/ctn 24 ctn/skid 960 pcs/skid
LIA-GBL4-9W-5CCT-LV-BK-D (Black trim)				3000K 3500K 4000K 5000K			