

## LED Linear High Bay

Engineered for high performance and adaptability, the LED Linear High Bay delivers an impressive 150lm/W efficiency with adjustable wattage (165W/225W) and CCT options for tailored illumination. Designed with a polycarbonate lens (UGR<28) to minimize glare, it ensures optimal visibility in commercial and industrial settings. Featuring a pre-installed sensor receptacle for easy motion sensor integration, a sleek slim profile.

### KEY FEATURES:


- Power and Color Selectable Linear High Bay
- 165W, 225W Adjustable Wattage and CCT
- High Lumen Efficacy 150lm/w
- Polycarbonate Lens UGR<28
- Pre-installed sensor receptacle
- Quick connect to motion sensor (pre-installed base)
- Sleek low-profile housing
- 50,000 hour life
- No flicker, mercury free, instant on

### APPLICATION


- Healthcare
- Warehouse
- Recreation Center
- Gymnasium
- Museum

### INSTALLATION

- Pendant
- Suspension
- Mounting: 3ft chains & hooks

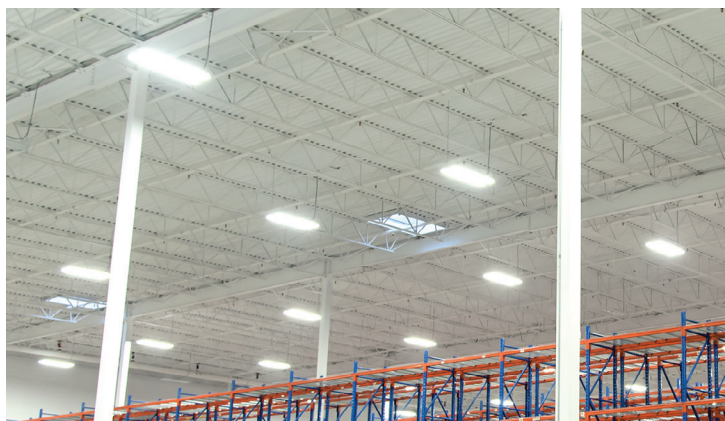

### DIMENSION

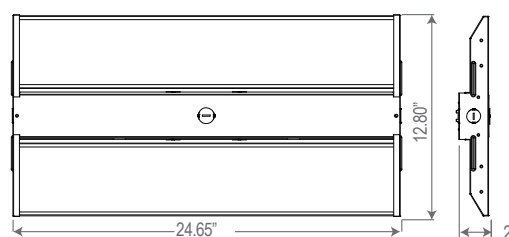

### SPECIFICATIONS

Luminous Efficacy	150lm/W
CCT	3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	90°
Input Voltage	120-347V
IP Rating	IP20
L70 Lifespan	50,000 Hours
LED Driver	Sosen
Chipset	Bridgelux SMD 2835
Dimmable	0-10V Dimmable
Operating Temp.	-40°C ~+45°C
Warranty	5 Year Warranty
Certifications	DLC Premium, ETL

MODEL NO.	DLC ID	WATTS	LUMENS	CCT(K)	PF	MOL <sub>(IN)</sub>	CASE QTY.
LIA-LHB2-165W-3CCT-HV-2PK	S-8347BP	90/120/165W	13500/18000/24750	3500/4000/5000 (K)	0.9	12.80x24.65x2	2
LIA-LHB2-225W-3CCT-HV-2PK	S-DWGBVG	120/165/225W	18000/24750/33750	3500/4000/5000 (K)	0.9	12.80x24.65x2	2
<b>Optional Accessories</b>							
LIA-LHB-MS	Motion Sensor for Linear High Bay Plug and Play Pin Type						
LIA-LHB-PIR	PIR Sensor for Linear High Bay Plug and Play Pin Type						
LIA-LHB-RC	Remote Control for Linear High Bay Works for Microwave and PIR Both						
LIA-LHB-CORD-5C-STOW-WH	10FT Cord 5-Core STOW 600VA White						