

LED UFO High Bay

Designed for superior performance and versatility, this high-efficiency UFO High Bay delivers an impressive 150lm/W with power and color selectable options, ensuring optimal lighting for various applications. Built for durability, it features NSF and NEMA 4X certifications, an IP65-rated design for wet locations, and a polycarbonate lens (UGR<28) for reduced glare.

KEY FEATURES:


- **Power and Color Selectable UFO High Bay**
- **High Lumen Efficacy 150lm/w**
- **NSF, NEMA 4X Certified**
- Polycarbonate Lens UGR<28
- 10FT cord whip, Eyebolt mount
- Quick connect to motion sensor (pre-installed base)
- L/N-PE: 6kV, L-N: 6kV surge prot.
- Quick & easy installation
- No flicker, mercury free, instant on

APPLICATION

- Healthcare
- Warehouse
- Recreation Center
- Gymnasium
- Museum



DIMENSION

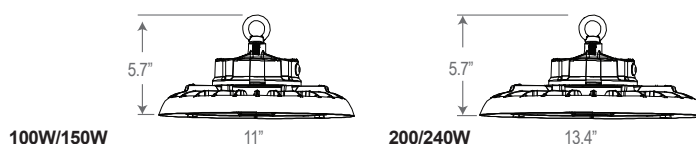

SPECIFICATIONS

Luminous Efficacy	150lm/W
CCT	3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	90°
Input Voltage	120-347V
IP Rating	IP65
L70 Lifespan	50,000 Hours
LED Driver	Fahold
Chipset	Lumileds 2835
Dimmable	0-10V Dimmable
Operating Temp.	-40°C ~+50°C
Warranty	5 Year Warranty
Certifications	DLC Premium, cUL, NSF/ANSI 2

MODEL NO.	DLC ID	WATTS	LUMENS	CCT(K)	PF	MOL	CASE QTY.
LIA-UHB-100W-D90-3CCT-HV-BK	S-5R3B37	60/80/100W	9000/12000/15000	3500/4000/5000 (K)	0.9	11x5.7	1
LIA-UHB-150W-D90-3CCT-HV-BK	S-B3Q1S7	100/120/150W	15000/18000/22500	3500/4000/5000 (K)	0.9	11x5.7	1
LIA-UHB-240W-D90-3CCT-HV-BK	S-YB9J5Y	200/220/240W	30000/33000/36000	3500/4000/5000 (K)	0.9	13.4x5.7	1
Optional Accessories							
LIA-UHB-MS	Motion Sensor (Microwave) for UFO High Bay PIR Sensor (Passive Infrared) for UFO High Bay Remote Control works with Motion and PIR Both						
LIA-UHB-PIR							
LIA-UHB-REMOTE							