

4^{FT} LED Wraparound

Designed for efficiency and adaptability, this 5.3" wide LED Wraparound Fixture is perfect for general illumination in commercial and residential spaces. Suitable for surface-mounted or suspended setups, it features a low-constant current driver for enhanced safety, energy savings, and durability. With 0-10V dimming, selectable wattage, and CCT, it seamlessly integrates into various settings, including workspaces, garages, laundry rooms, stairwells, and more.

KEY FEATURES:


- **Power Adj. 4^{FT} 46W and CCT (3500K/4000K/5000K)**
- **High Lumen Efficacy 130lm/w**
- **Milky Polycarbonate (PC) lens durable white cold-rolled steel plate housing**
- Internal watt/color selector switch
- Knockout holes on end caps for seamless linkable and continuous installation
- Removable lens for quick installation
- No flicker, mercury free, instant on

APPLICATION

- Garages
- Kitchen & Pantries
- Laundry Rooms
- Workshops
- Utility Rooms
- Stairwells



DIMENSION

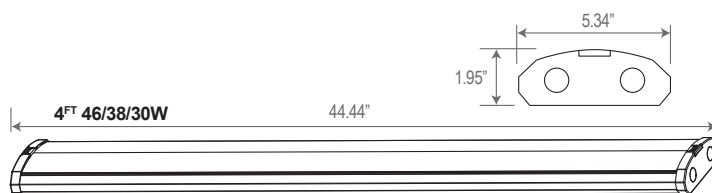

SPECIFICATIONS

Luminous Efficacy	130lm/W
CCT	3500K/4000K/5000K (Selectable)
CRI	>Ra80
Beam Angle	110°
Input Voltage	120-347V
Auxiliary Output	12V
IP Rating	IP20
L70 Lifespan	50,000 Hours
Chipset	SMD2835
Dimmable	0-10V Dimmable
Operating Temp.	-20°C ~+45°C
Warranty	5 Year Warranty
Certifications	DLC Premium, ETL

MODEL NO.	DLC ID	WATTS	LUMENS	CCT(K)	PF	MOL	CASE QTY.
LIA-WA4-46W-3CCT-HV	S-J35JRH	46/38/30	5980/4940/3900	3500/4000/5000 (K)	0.9	44.44x5.34x1.95	1 pc/box 6 pcs/ctn

Additional Info:

Surface Mount & Suspended.

Optional (special order): Emergency battery backup kit, Microwave sensor.

DLC ID: S-J35JRH Premium: Stairwell and Passageway Luminaires

S-CVVVVV Standard: Direct Linear Ambient Luminaires

S-B11V1G Standard: Low-Bay Luminaires for Commercial and Industrial Buildings